

SINGLE LAMP LED BULB

Data Sheet

Description:

These single lamp LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 9mm round shaped radiation pattern (60°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb. Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

Feature:

- Wide view angle
- High luminous output
- Seven kind color
- Solid-state Vibration resistant
- Saving power
- Long life

Option:

- 6V to 240V AC or DC
- Other industry standard base


A-BRIGHT

A-BRIGHT INDUSTRIAL CO.,LTD.

Part No.: AB-9B5-6V-E

Single Lamp LED Bulb

PACKAGE DIMENSIONS:

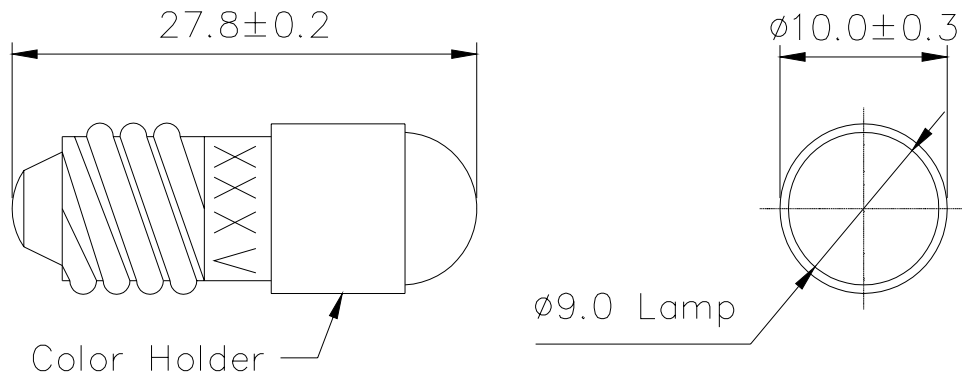

NOTE:

1. All dimensions are in millimeter.
2. Wedge base : E10.
3. All tolerance are ± 0.5 mm.

Part No.: AB-9B5-6V-E

Single Lamp LED Bulb

FEATURE:

- SUPER LUMINOSITY BLUE LED (InGaN).
- WHITE DIFFUSE PACKAGE.
- 9mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- BASE MODEL E10.
- ELECTRIC AC/DC BI-POLAR.

MATERIALS:

- LED LENS: UV RESISTENT EPOXY
- BULB BASE HOLDER: PBT+G6

ABSOLUTE MAXIMUM RATING: $T_a = 25\text{ }^{\circ}\text{C}$

- PEAK OPERATE VOLTAGE..... 7 V
- OPERATING TEMPERATURE..... $-25\text{ TO }+85^{\circ}\text{C}$
- STORAGE TEMPERATURE..... $-35\text{ TO }+100^{\circ}\text{C}$
- LED BULB LIFE..... 20000 HOURS
(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC $T_a = 25^{\circ}\text{C}$

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Operate Voltage		V	-----	6	7	V
Luminous Intensity	$I_F = 10\text{ mA}$	I_v	200	260	-----	mcd
Dominant Wavelength	$I_F = 10\text{ mA}$	λ_d	-----	470	-----	nm
Spectrum Radiation Bandwidth	$I_F = 10\text{ mA}$	$\Delta\lambda$	-----	30	-----	nm
Forward Current	$V_{IN} = 6\text{ V DC}$	I_F	-----	10	-----	mA
Viewing Angle		$2\theta_{1/2}$	-----	60	-----	deg